

# Distributed Software Development Information Interchange

Chris Brooks

Department of Computer Science  
University of San Francisco

Department of Computer Science — University of San Francisco — p. 177

## 18-2: Outline

- Ontologies
  - What are they?
  - Why are they useful?
- OWL
- Standards for representing information
- Information Exchange
  - Old-school, top-down
  - New-school, bottom-up
- Ontologies and folksonomies

Department of Computer Science — University of San Francisco — p. 277

## 18-3: Ontologies

- An ontology is a vocabulary that describes all of the objects of interest in the domain and the relations between them.
  - All of the relevant knowledge about a problem we are interested in.
- Ontologies allow knowledge about a domain to be shared between agents (including humans).
- This can allow knowledge to be reused more easily.
- Allows an agent to perform inference with its current knowledge

Department of Computer Science — University of San Francisco — p. 377

## 18-4: Example

- Let's suppose that we're interested in selling books online.
- We would like to represent information about:
  - Books: title, author, ISBN, etc.
  - Authors: name, books written, URL, etc.
  - Customers: name, address, orders, payment info, etc.
  - Orders: books, date, address, shipper, etc.
- How might we do this?
  - Note - this is a different question than "How would we store this?" the answer to that is most likely a relational DB.

Department of Computer Science — University of San Francisco — p. 477

## 18-5: Representing Knowledge

- More generally, how might we choose to represent knowledge so that a program can work with it?
- Keywords or tags. Quick and easy way to map terms onto data.
- Thesauri - Adds some descriptive power: more specific, more general, related.
- Taxonomy - Provides a classification structure - subclasses and superclasses.
- Ontology - provides potentially arbitrary relationships between data.

Department of Computer Science — University of San Francisco — p. 577

## 18-6: Ontologies again

- So an ontology is really just a formal way of describing the data in our system.
- Ontology-modeling languages usually include support for
  - Classes and instances
  - Inheritance
  - Relations between instances
  - Mechanisms for inference
- UML is an example of an ontology language.
- A big advantage of ontology-driven tools is the ability to reason about or to infer new facts about data.
- The challenge in a distributed environment is reconciling different ontologies or representations.

Department of Computer Science — University of San Francisco — p. 677

#### 18-7: Example: ebXML

- ebXML is an XML dialect created to provide a common language for business transactions.
- Meant to provide a common language for describing:
  - Business Processes
  - Core data components
  - Messaging
  - Registries and Repositories
- Example: Dealersphere
  - Built with ebXML, allows dealers to automate the process of credit checks, contract creation, searching for specific cars at other dealers, interoperating with each other.
  - Uses SOAP, J2EE, and ebXML

#### 18-8: Representational Power

- What sort of representational power does XML provide us?

#### 18-9: Representational Power

- What sort of representational power does XML provide us?
- Can assign metadata (or class information) to data
- Can specify sub-elements associated with elements
  - has-A relation
- Can specify actual data types
- Can specify sequences, sets
- Can uniquely identify objects

#### 18-10: Representational Power

- What additional representational power is provided by RDF?
- Arbitrary two-place relations between objects
- Inheritance of classes
- Inheritance of Properties
- Statements about statements
- Containers of objects
  - Sets, Bags, Sequences, Alternatives

#### 18-11: Representational Power

- Believe it or not, this is still very limited.
- What other sorts of things might we want to represent?

#### 18-12: Representational Power

- Believe it or not, this is still very limited.
- What other sorts of things might we want to represent?
- Class-specific property ranges. For example, in a music ontology, we might want to say that percussionists only play drums, while other performers can play any instrument.
- Disjointness. For example, male and female.
- Boolean combinations of classes. For example, we might want to define 'musician' to be the union of singer, performer, and composer.
- Cardinality restrictions. For example, a song has at least one composer, or a person has exactly one mother.
- Transitivity
- Inverse

### 18-13: OWL

- Web Ontology Language (OWL) provides a way to specify all of these concepts in what is called a *description logic*.
- Provides the ability to define concepts in terms of other concepts, along with restrictions and Boolean connectives.
- Tradeoffs: expressivity vs efficiency
  - OWL Full: most expressive, contains all the concepts described above. Inference is undecidable and (therefore) not complete.
  - OWL DL: Restricts the ways in classes can be defined in terms of each other. Inference is complete, complexity unknown (NP-hard).
    - This is the representation Protege uses.
  - OWL Lite: disallows cardinality, enumerations, disjointness. Complexity: NP-complete, fast in practice.
- In practice, relatively efficient reasoners can be built for OWL DL.

Department of Computer Science — University of San Francisco — p. 13/77

### 18-14: OWL example

- (from Singh and Huhns)
- A trivial ontology defining animals
- Uses simple subclasses and properties
  - Disjointness goes beyond RDF
  - Object properties refine RDF properties; relate two objects

```
<owl:Class rdf:ID="Mammal">
  <rdfs:subClassOf rdf:resource="#Animal"/>
  <owl:disjointWith rdf:resource="#Reptile"/>
</owl:Class>
```

```
<owl:ObjectProperty rdf:ID="hasParent">
  <rdfs:domain rdf:resource="#Animal"/>
  <rdfs:range rdf:resource="#Animal"/>
</owl:ObjectProperty>
```

Department of Computer Science — University of San Francisco — p. 14/77

### 18-15: OWL inference

- What's attractive about OWL is the ability to perform inference.
- This allows us to discover class relationships that were not present in the data.
- Given the definition for the property hasParent and

```
<owl:Thing rdf:ID="Fido">
  <hasParent rdf:resource="#Rover"/>
</owl:Thing>
```
- We can infer that Fido is an Animal

Department of Computer Science — University of San Francisco — p. 15/77

### 18-16: Using Inference to Build Class Relationships

- Knowledge engineering is a difficult process.
- People are usually not able to describe a complete ontology.
- Description Logic uses the following approach:
  - For a class, describe the necessary and sufficient conditions to be a member of that class.
  - Use automated inference to discover ontological structure.

Department of Computer Science — University of San Francisco — p. 16/77

### 18-17: Using Inference to Build Class Relationships

- Class construction happens in two stages:
- Explicitly (as in the examples above) or
- Anonymously, using
  - Restrictions
  - Set operators: intersectionOf, unionOf, complementOf, e.g.,

```
<owl:Class rdf:ID="SugaryBread">
  <owl:intersectionOf rdf:parseType="Collection">
    <owl:Class rdf:about="#Bread"/>
    <owl:Class rdf:about="#SweetFood"/>
  </owl:intersectionOf>
</owl:Class>
```

Department of Computer Science — University of San Francisco — p. 17/77

### 18-18: Restrictions

- Restrictions govern the necessary and sufficient conditions for membership in a class.
    - someValuesFrom, allValuesFrom, hasValue, minCardinality, maxCardinality, etc.
- ```
<owl:Restriction>
  <owl:onProperty rdf:resource="#hasFather"/>
  <owl:maxCardinality rdf:datatype="xsd:nonNegativeInteger">
    1
  </owl:maxCardinality>
</owl:Restriction>

<owl:Restriction>
  <owl:onProperty rdf:resource="#bakes"/>
  <owl:someValuesFrom rdf:resource="#Bread"/>
</owl:Restriction>
```
- The reasoner uses restrictions to infer class membership and identity.

Department of Computer Science — University of San Francisco — p. 18/77


#### 18-19: Information Interchange

- Ontologies can help in the description of services and the data they interchange.
- Problem: How do we get all parties involved to agree on the ontologies to use and to understand their proper use?
- Old approach: develop standards
- New approach: discover mappings

#### 18-20: Developing Standards

- Several standard ontologies have been developed, at varying levels of generality.
- UBL - Universal Business Library. Meant to provide definitions for business logic.
- Cyc Upper Ontology. Meant to provide an ontology for describing "common-sense" knowledge.
- IEEE Standard Upper Ontology. Also meant to define general terms and concepts for specifying domain-specific ontologies.

#### 18-21: UBL

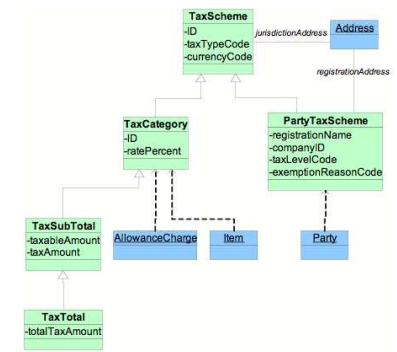

#### 18-22: Cyc

- The Cyc project has been going on for over 20 years.
- Goals:
  - Formally encode "common-sense" knowledge - the sorts of things everyone knows, but aren't found in encyclopedias.
  - "If you spill water on yourself, you will be wet afterwards."
  - Use this base to develop domain-specific ontologies and create agents that can reason deeply about a particular domain.
- Turns out to be a very hard problem
- Currently releasing their KB as open-source - 300,000 concepts, over 1 million facts.

#### 18-23: Advantages of Standardization

- Once standards exist and are agreed upon,
  - Save time and improve performance
  - Enable the development of specialized tools.
  - Improve the longevity and reusability of a solution
  - Suggest directions for improvement


#### 18-24: Problems with Standardization

- Standardization process is slow
- Still need to support legacy data
- Standards may not cover all necessary knowledge
- People will use their own ontologies for competitive advantage.
- "Heterogeneity is the normal state of affairs"

### 18-25: An alternate approach: mapping between ontologies

- Singh and Huhns describe an alternative approach to interoperability
- The construction of a *semantic bridge* between ontologies
- Example case:
  - You want your agent to get the results of a service for you
  - You express your needs in a query language
  - The service provider uses a different representation
  - Your agent must discover how to map your query into the provider's representation.

### 18-26: Example



- In the upper example, there's no clear way to map these two concepts.
- By using a third ontology, and information about how both of the other two ontologies map onto this ontology, we can infer a mapping between the original ontologies.

### 18-27: Merging Concepts in Ontologies

- The approach in Singh and Huhns consists of the following steps:
  - Bootstrap as much as possible with labeled data
  - Smart substring matching to identify points of similarity
  - Use graph structure to match other concepts.

### 18-28: Merging Concepts in Ontologies

- To match fragments of ontologies A and B, start by trying to find an ontology fragment C that shares some terminology with each of these.
- Ideally, there are many Cs, each describing some portion of a domain
  - Each C will have a different emphasis
  - Some concepts in common, some concepts different.
- This approach will work best for problems in which a number of individuals have constructed representations of a domain independently.

### 18-29: Merging Concepts in Ontologies

- Observation: when trying to determine how a concept in ontology A relates to a concept in ontology B, exactly one of seven relationships must hold:
  - subClass
  - superClass
  - partOf
  - hasPart
  - sibling
  - equivalence
  - other
- Problem - figure out which of these relationships is most likely.

### 18-30: Merging Concepts in Ontologies

- Begin with concepts known to match.
- Use string-matching to find concepts with identical/very similar names.
  - This provides a mapping at the lexical level
- At this point, there are some points of connection between each of a number of heterogeneous ontologies.

#### 18-31: Constructing a consensus ontology

- Next, Common structural information is inferred
- Concept a in ontology A is believed to map onto concept a' in ontology A'
- Concept b in ontology B is believed to map onto concept b' in ontology B'
- If a is a subclass of b in A, we can infer that a' is a subclass of b' in B'
- note: this is the sort of inference that's done in the Human Genome Project.

#### 18-32: Constructing a consensus ontology

- Equivalence heuristics can be applied to concepts from each ontology that have common subclass and superclass relationships.
  - For example, in the experiment Singh and Huhns describe, they were able to discover that all Person concepts in ontology A fit the description of Human concepts in ontology B, and all Human concepts in ontology B fit the Person concepts from ontology A.
  - Therefore, Person and Human are equivalent concepts in the different ontologies.

#### 18-33: Limitations

- This approach focuses on lexical and syntactic methods for determining similarity.
- More powerful approaches might use:
  - Other information sources (thesauri, dictionaries, etc)
  - More sophisticated schemes for resolving conflicts between ontologies
    - Interesting theoretical barriers to voting
  - Developing models of authority

#### 18-34: "Correct" versus common usage

- An issue that comes up in the construction of consensus ontologies is the determination of meaning.
- Should a piece of information be categorized "correctly" or where most people would place it?
  - In other words, should an information provider place a piece of information at its "true" location, or
  - Where users are likely to search for it?
- e.g. If most users think that whales are fishes, should we place whale information in the fish category, or the mammal category?
- This is actually a manifestation of a much deeper linguistic problem - is meaning determined by authority, or usage?

#### 18-35: Folksonomies

- Some researchers criticize the entire idea of ontologies
  - Real-world knowledge is messy and difficult to formalize
  - Meaning should be determined through consensus, rather than specified from the top down.
- Simple schemes for annotating data, when combined with large numbers of users, lead to a collaborative determination of the meaning associated with an annotation.
- This idea is often referred to as *folksonomy*.

#### 18-36: Folksonomies

- The most well-known examples of systems that take this approach are shared-tagging systems such as del.icio.us and flickr.
- Users assign tags to photos or web pages.
- Argument: the meaning of a tag, such as "linux" is determined by the way in which it is used, rather than being specified by some external source.

#### 18-37: Ontologies vs Folksonomies

- Are these ideas really completely different from each other?

#### 18-38: Ontologies vs Folksonomies

- Are these ideas really completely different from each other?
- Most ontology research recognizes that a single standard ontology is not realistic.
- Both worlds are interested in achieving consensus through distributed creation and sharing of knowledge.
- Folksonomies typically eschew relational information
  - Makes systems easy to use, but limits expressivity
- Ontologies provide a great deal of relational power
  - More flexible, but more complex to use

#### 18-39: Summary

- Ontologies are a formal way of representing the knowledge about a domain.
- OWL is a language for implementing ontologies specifically designed for the Web
  - Built on top of RDF
- Exchange of information between organizations is a fundamental problem in distributed systems
- Standards are great when they work, but can't be assumed
- Consensus through inference is an appealing alternative, but deep semantic matching is still a research topic.