Compilers

CS414-2017S-04

Abstract Syntax Trees

David Galles

Department of Computer Science
University of San Francisco

04-0: Abstract Syntax Tree (AST)

- Parse trees tell us exactly how a string was parsed
- Parse trees contain more information than we need
  - We only need the basic shape of the tree, not where every non-terminal is
  - Non-terminals are necessary for parsing, not for meaning
- An Abstract Syntax Tree is a simplifed version of a parse tree – basically a parse tree without non-terminals

04-1: Parse Tree Example

$E \rightarrow E + T$

$E \rightarrow T$

$T \rightarrow T * F$

$T \rightarrow F$

$F \rightarrow$ num

Parse tree for 3 + 4 * 5

04-2: Parse Tree Example

$E \rightarrow E + T$

$E \rightarrow T$

$T \rightarrow T * F$

$T \rightarrow F$

$F \rightarrow$ num

Parse tree for 3 + 4 * 5

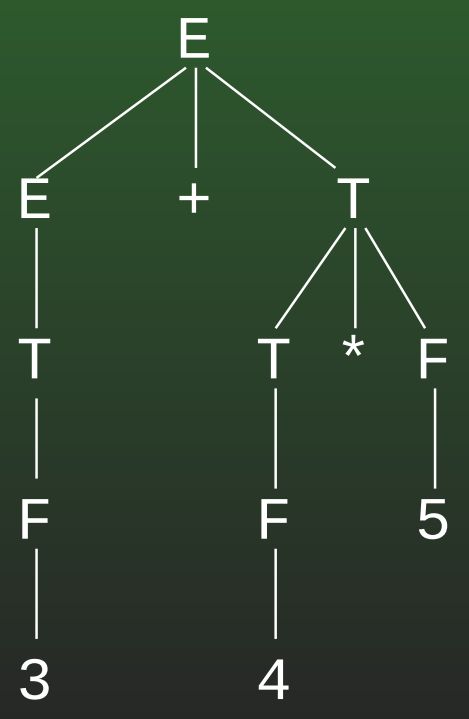

04-3: Abtract Syntax Tree Example

$E \rightarrow E + T$

$E \rightarrow T$

$T \rightarrow T * F$

$T \rightarrow F$

$F \rightarrow$ num

Abstract Syntax Tree for 3 + 4 * 5

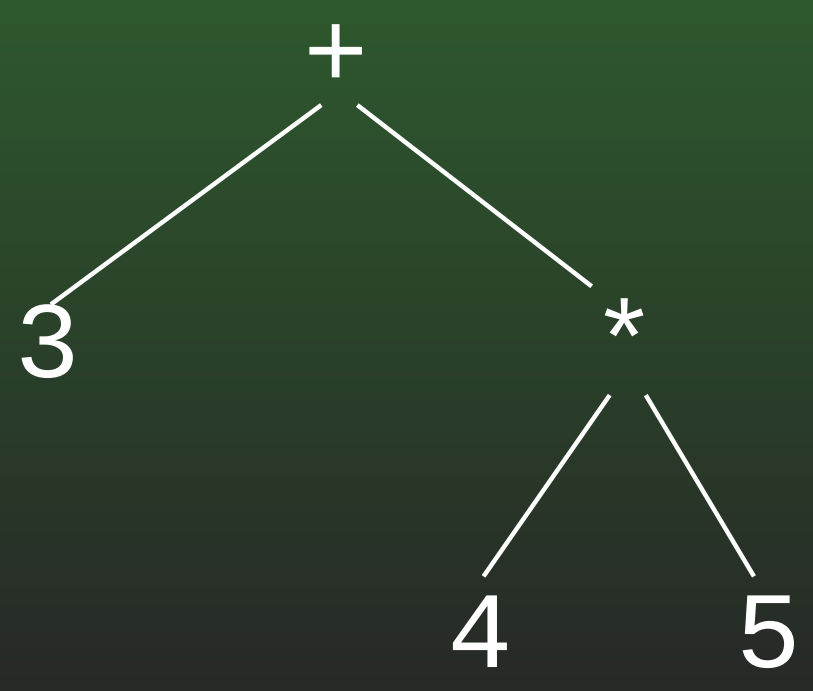

04-4: AST – Expressions

- Simple expressions (such as integer literals) are a single node
- Binary expressions (+, *, /, etc.) are represented as a root (which stores the operation), and a left and right subtree
  - 5 + 6 * 7 + 8 (on whiteboard)

04-5: AST – Expressions

- What about parentheses? Do we need to store them?

04-6: AST – Expressions

- What about parentheses? Do we need to store them?
  - Parenthesis information is store in the shape of the tree
  - No extra information is necessary

3 * (4 + 5)

04-7: AST – Expressions

3 * (4 + 5)

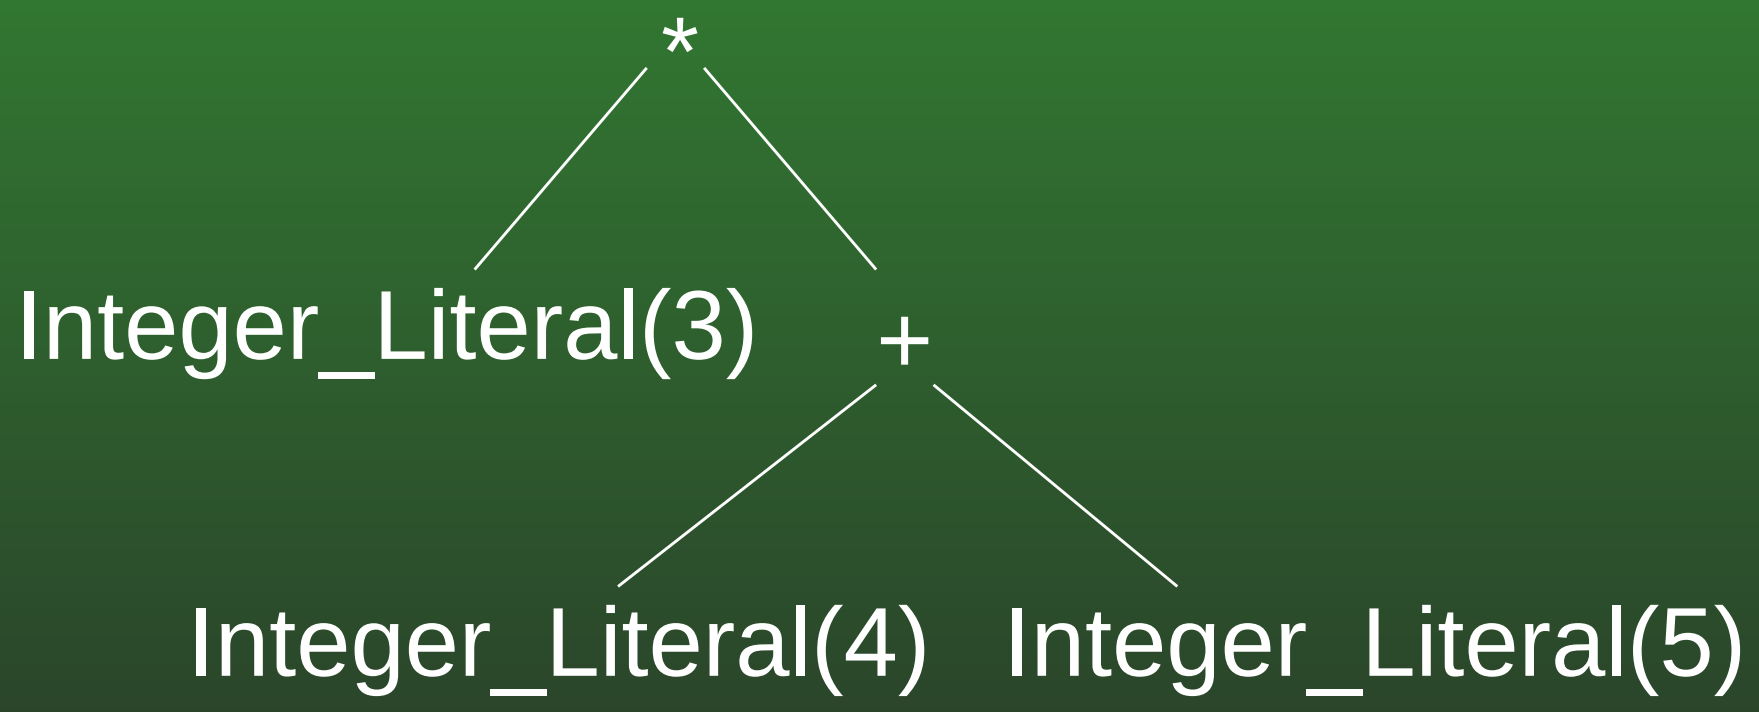

04-8: AST – Expressions

(3 + 4) * (5 + 6)

04-9: AST – Expressions

(3 + 4) * (5 + 6)

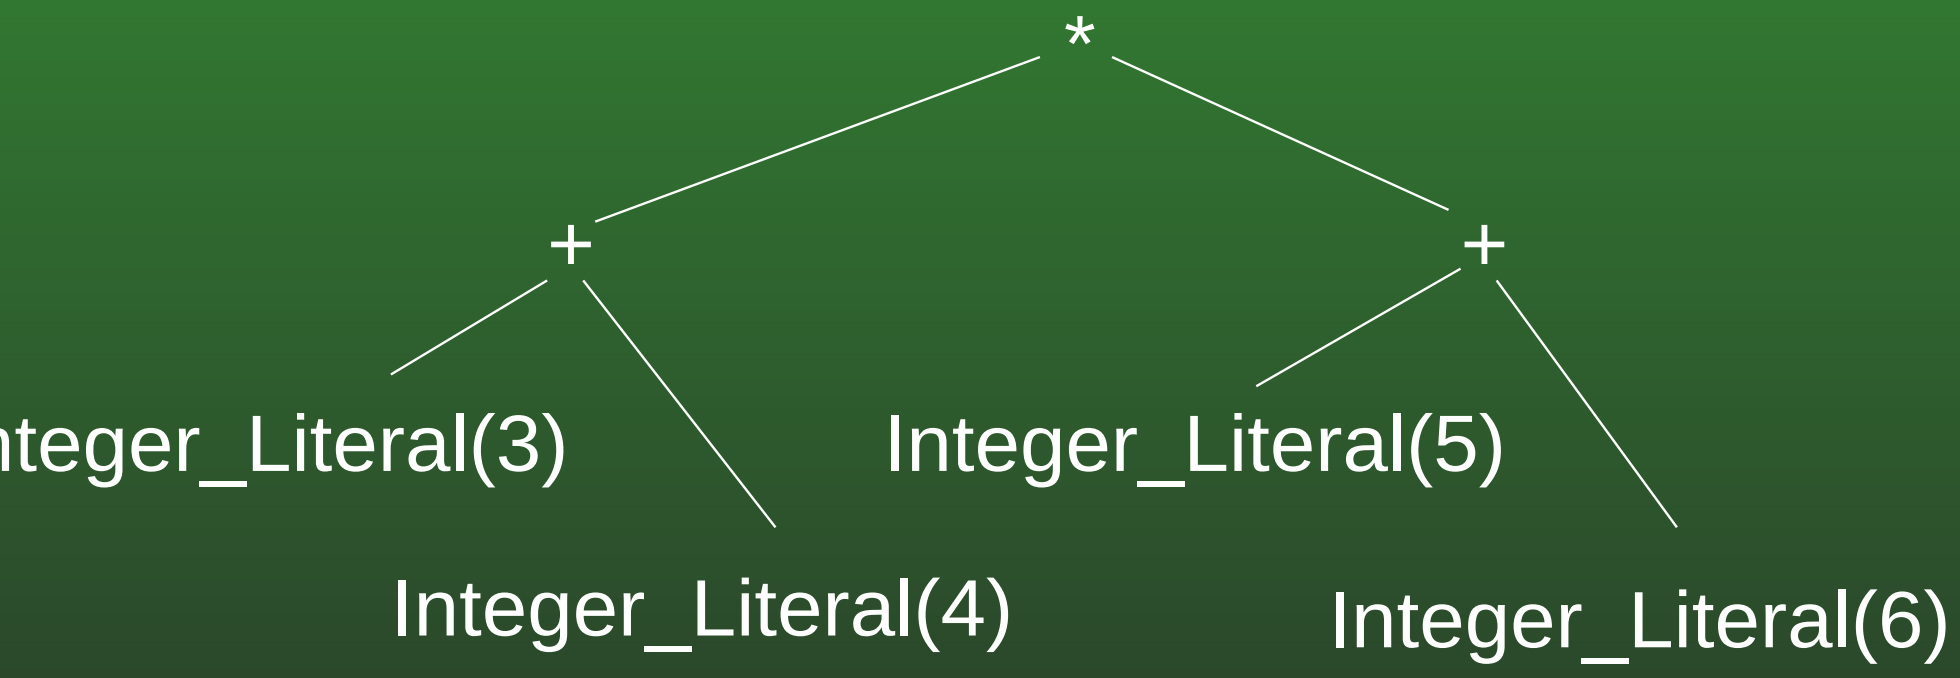

04-10: AST – Expressions

(((4)))

04-11: AST – Expressions

(((4)))

Integer_Literal(4)

04-12: AST – Variables

- Simple variables (which we will call *Base Variables*) can be described by a single identifier.
- Instance variable accesses (`x.y`) require the name of the base variable (`x`), and the name of the instance variable (`y`).
- Array accesses (`A[3]`) require the base variable (`x`) and the array index (`3`).
- Variable accesses need to be extensible
  - `x.y[3].z`

04-13: AST – Variables

- **Base Variables** Root is “BaseVar”, single child (name of the variable)
- **Class Instance Variables** Root is “ClassVar”, left subtree is the “base” of the variable, right subtree is the instance variable name
- **Array Variables** Root is “ArrayVar”, left subtree is the “base” of the variable, right subtree is the index

04-14: AST – Variables

04-15: AST – Instance Variables

```
class simpleClass {
   int a;
   int b;
}
class complexClass {
   int u;
   simpleClass v;
}
void main() {
   complexClass x;
   x = new complexClass();
   x.v = new simpleClass();

   x.v.a = 3;
}
```

04-16: AST – Instance Variables

x.v.a

04-17: AST – Instance Variables

x.v.a

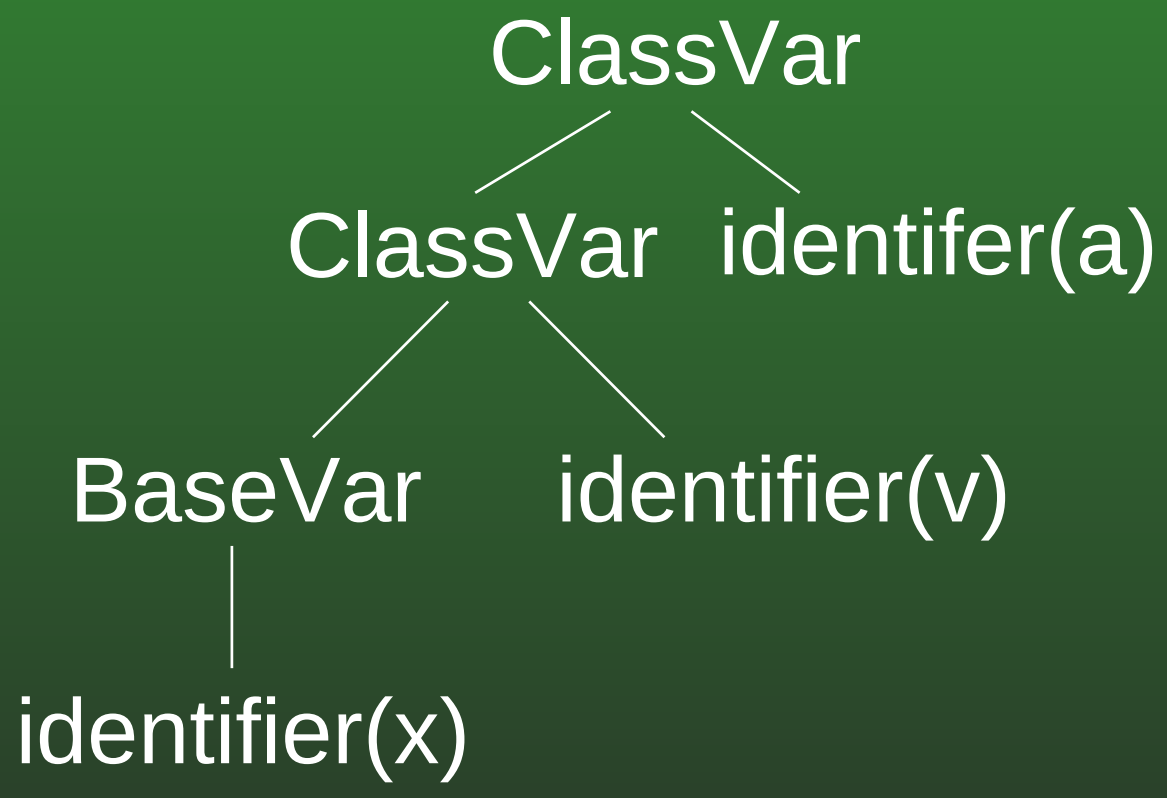

04-18: AST – Instance Variables

w.x.y.z

04-19: AST – Instance Variables

w.x.y.z

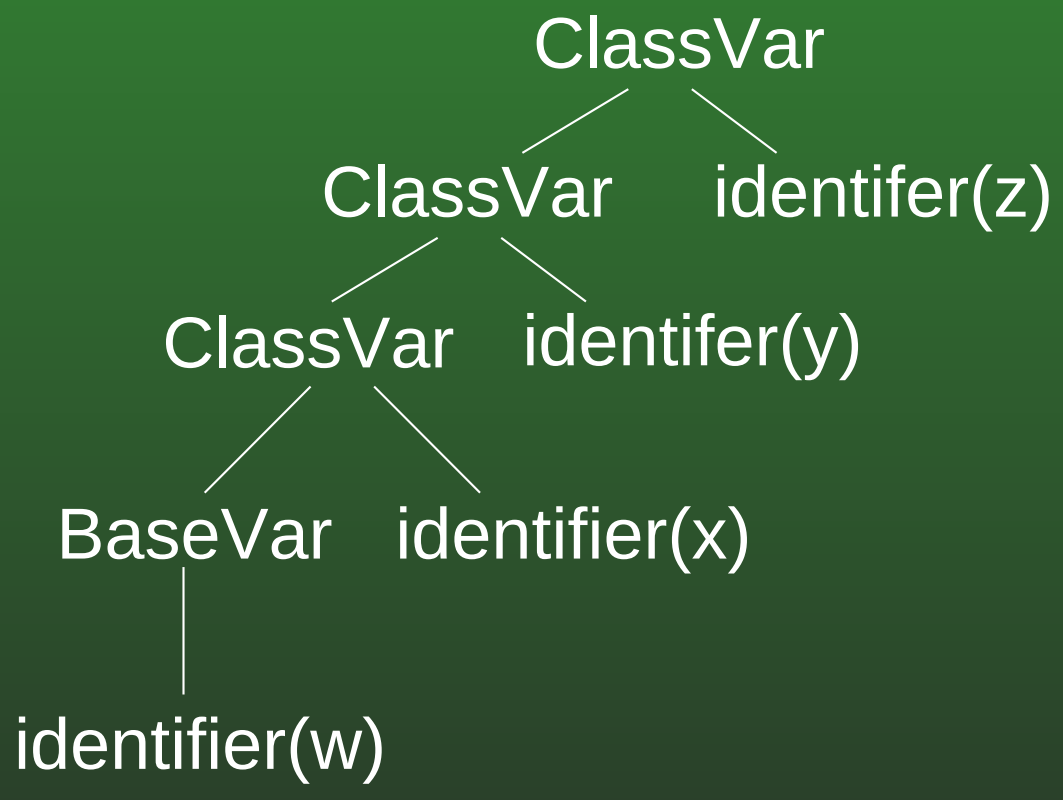

04-20: AST – Instance Variables

v.w[x.y].z

04-21: AST – Instance Variables

v.w[x.y].z

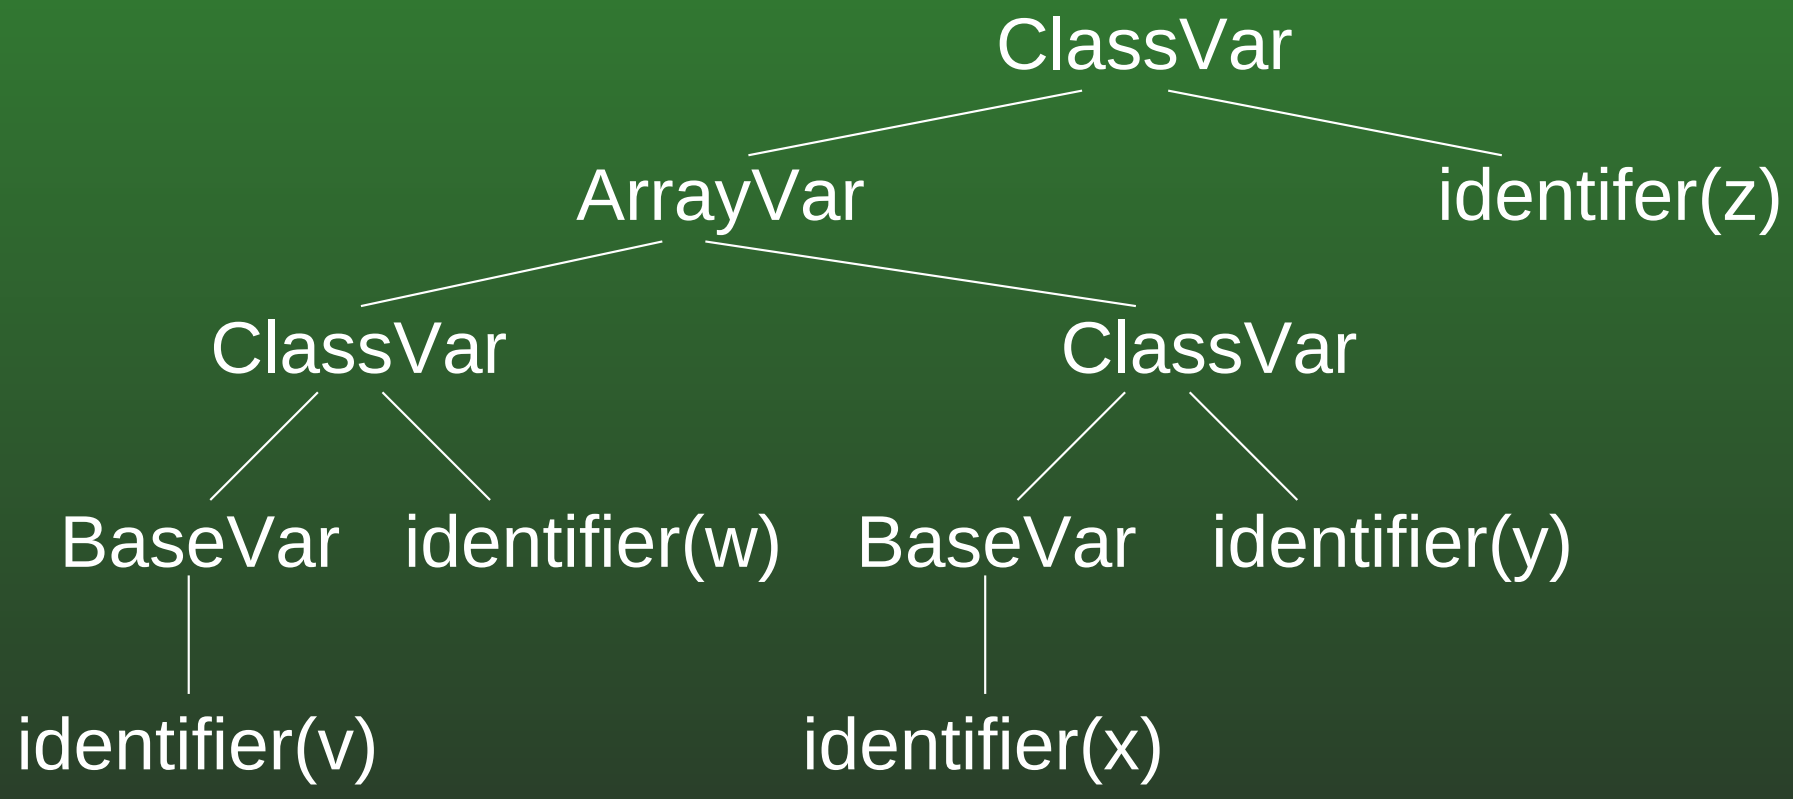

04-22: AST – Statements

- Assignment Statement Root is “Assign”, children for left-hand side of assignment statement, and right-hand side of assignment statement

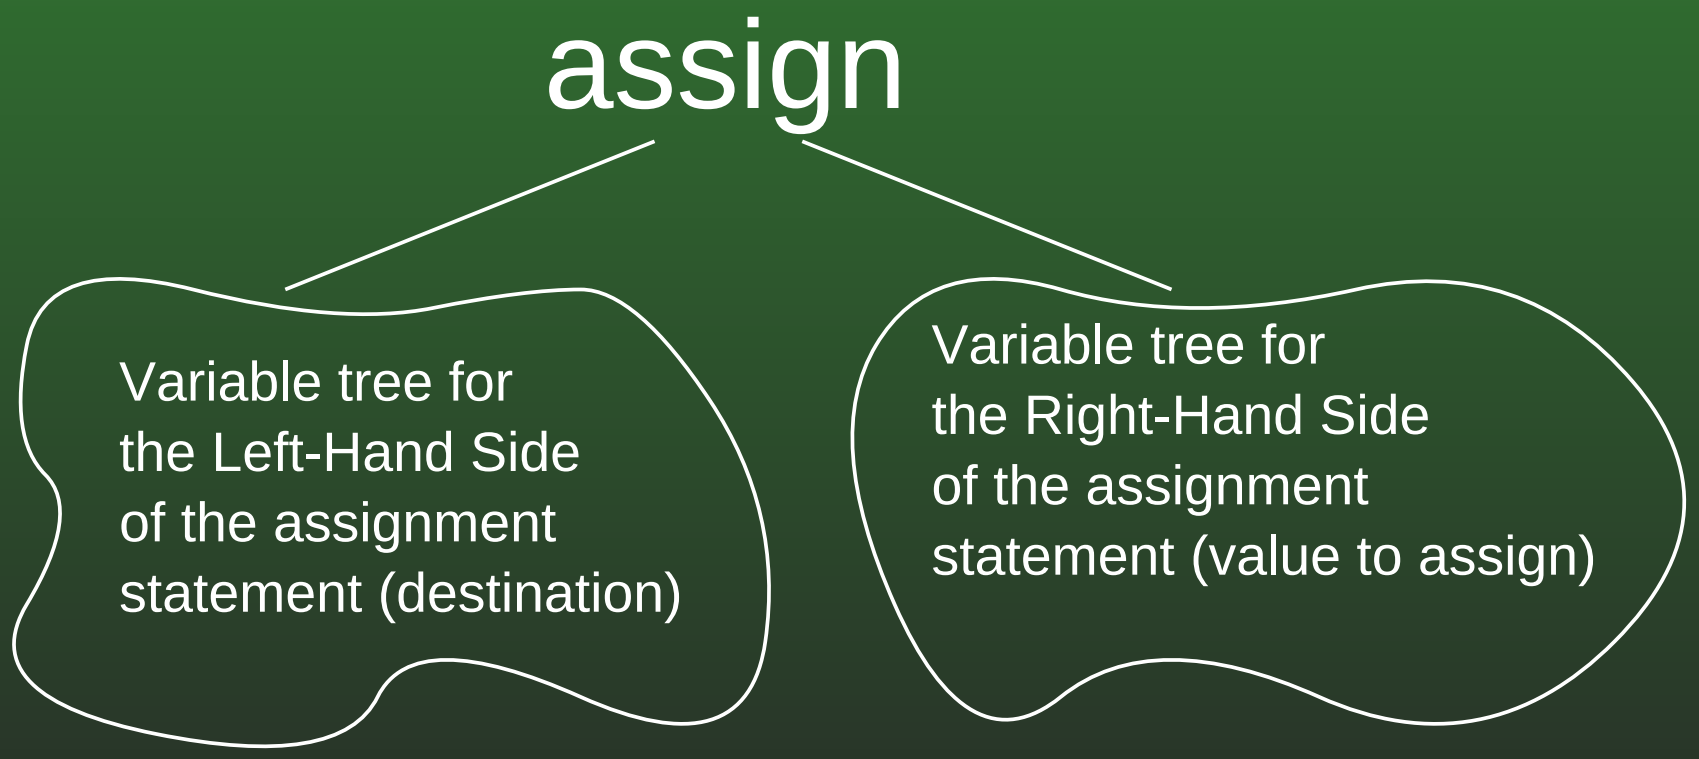

04-23: AST – Statements

- If Statement Root is “If”, children for test, “then” clause, and “else” clause of the statement. The “else” tree may be empty, if the statement has no else.

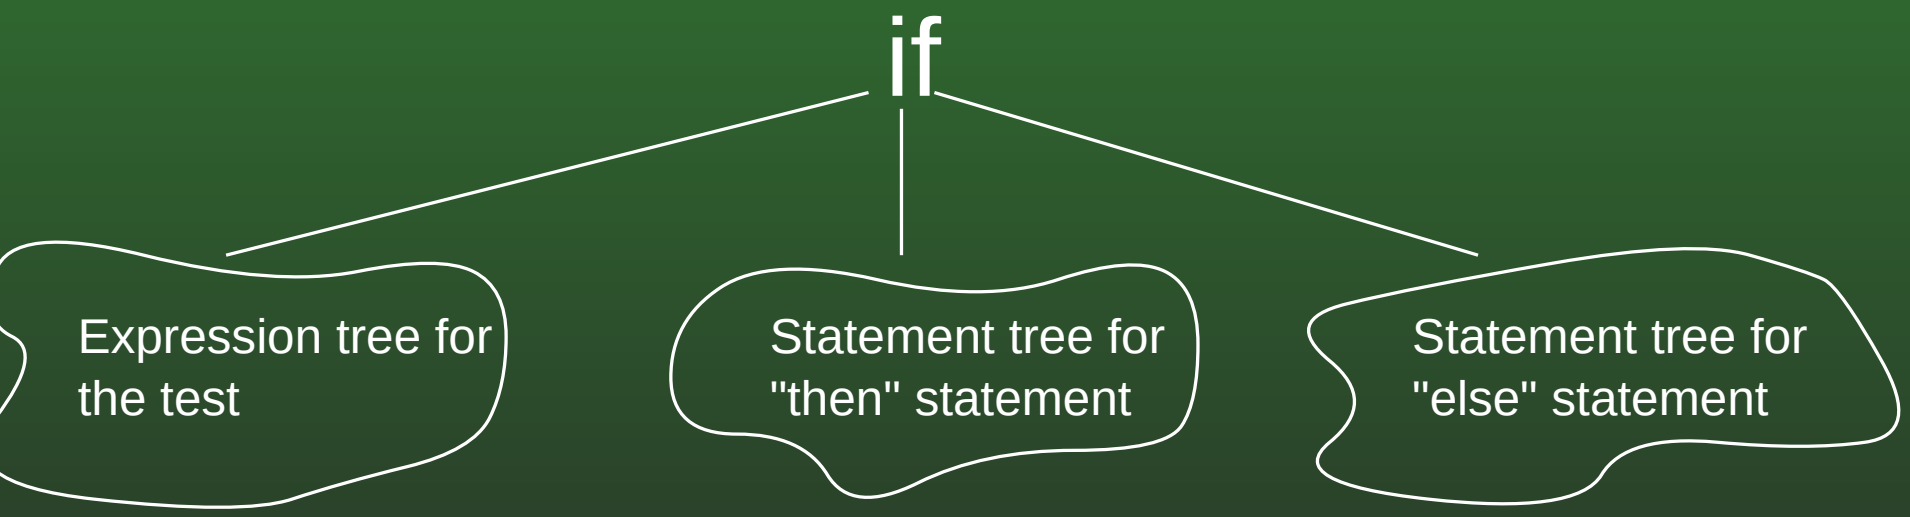

04-24: AST – Statements

- **While Statement** Root is “While”, children for test and body of the while loop.

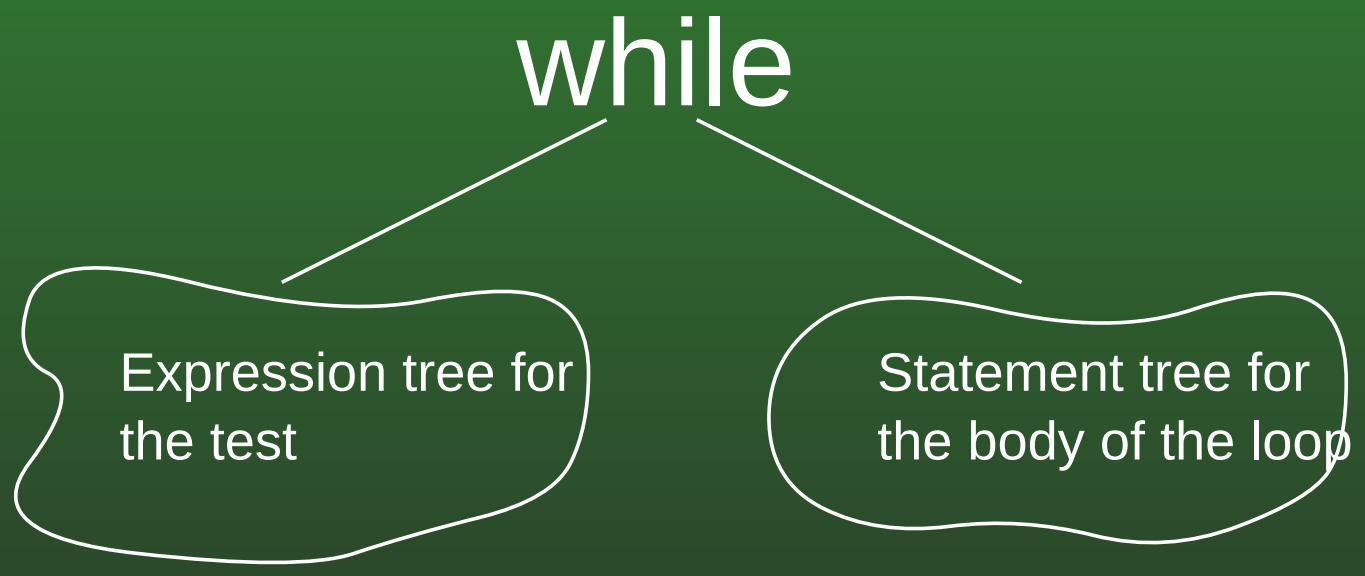

04-25: AST – Statements

- **Block Statement** That is, {<statement1>; <statement2>; ... <statementn> }. Block statements have a variable number of children, represented as a Vector of children.

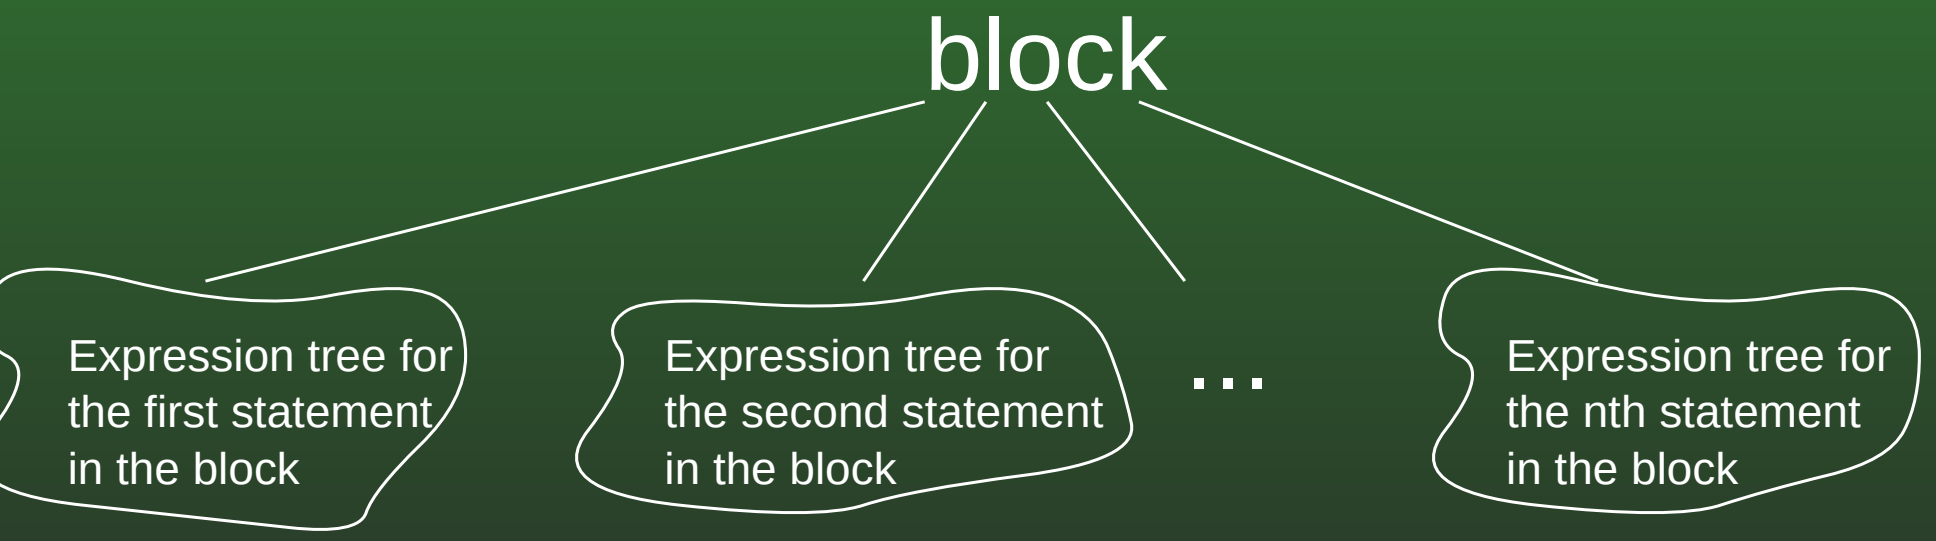

04-26: AST – Statements

- **Variable Declarations**
  - Non-array variable declaration

    ```
    <TYPE> <NAME>;
    ```

  - One-Dimensional array declaration

    ```
    <TYPE> <NAME>[];
    ```

  - Two-Dimensional array declaration

    ```
    <TYPE> <NAME>[][];
    ```

04-27: AST – Statements

- Variable Declarations ASTs for variable declarations have 4 children:
  - An identifier, for the type of the declared variable
  - An identifier, for the name of the declared variable
  - An integer, for the dimensionality of the array (non-array variables have dimension 0)
  - An expression tree, which represents the initial value (if any)

04-28: Variable Declarations

```
nt x = 3;
```

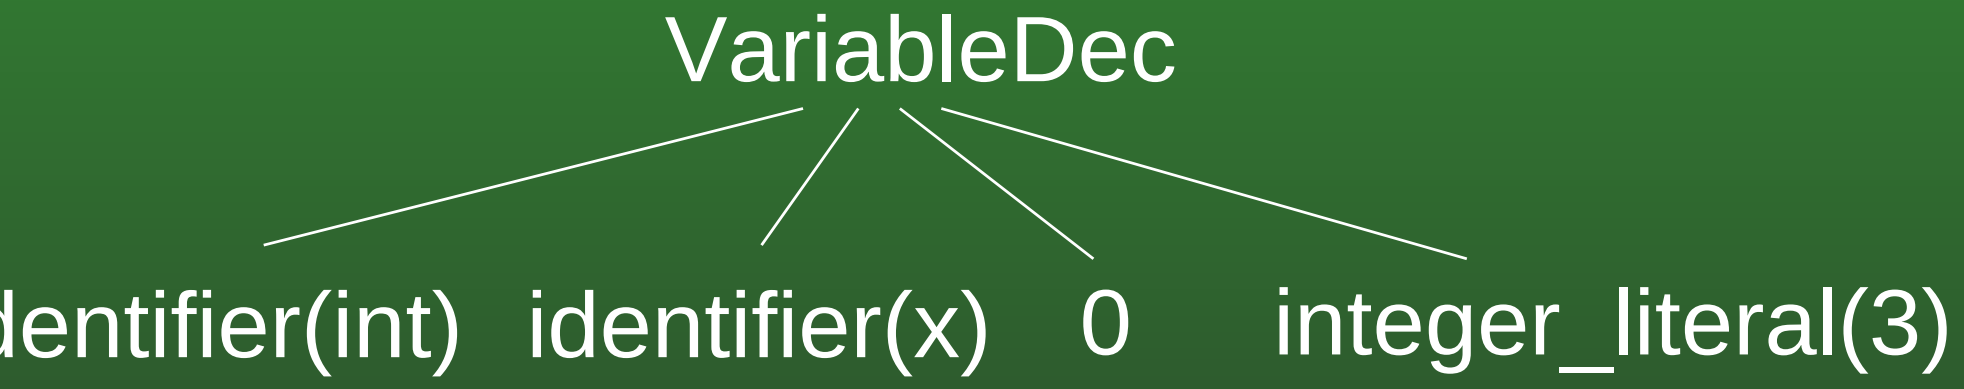

04-29: Variable Declarations

```
int y[][];
```

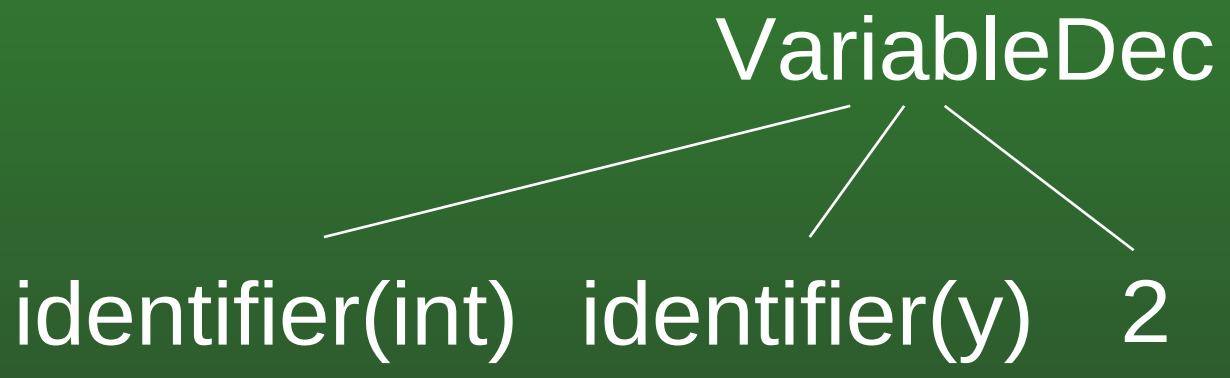

04-30: New Array Expressions

- New Array expressions are similar to variable expressions:
  - Single dimensional array

    ```
    new int[3];
    ```

  - Two dimensional array

    ```
    new int[3][];
    ```

  - Three dimensional array

    ```
    new int[4][][];
    ```

04-31: New Array Expressions

- New Array expressions have 3 children
  - Type of array to allocate
  - Number of elements in the new array
  - Dimensionality of each array element

04-32: New Array Expressions

```
new int[3];
```

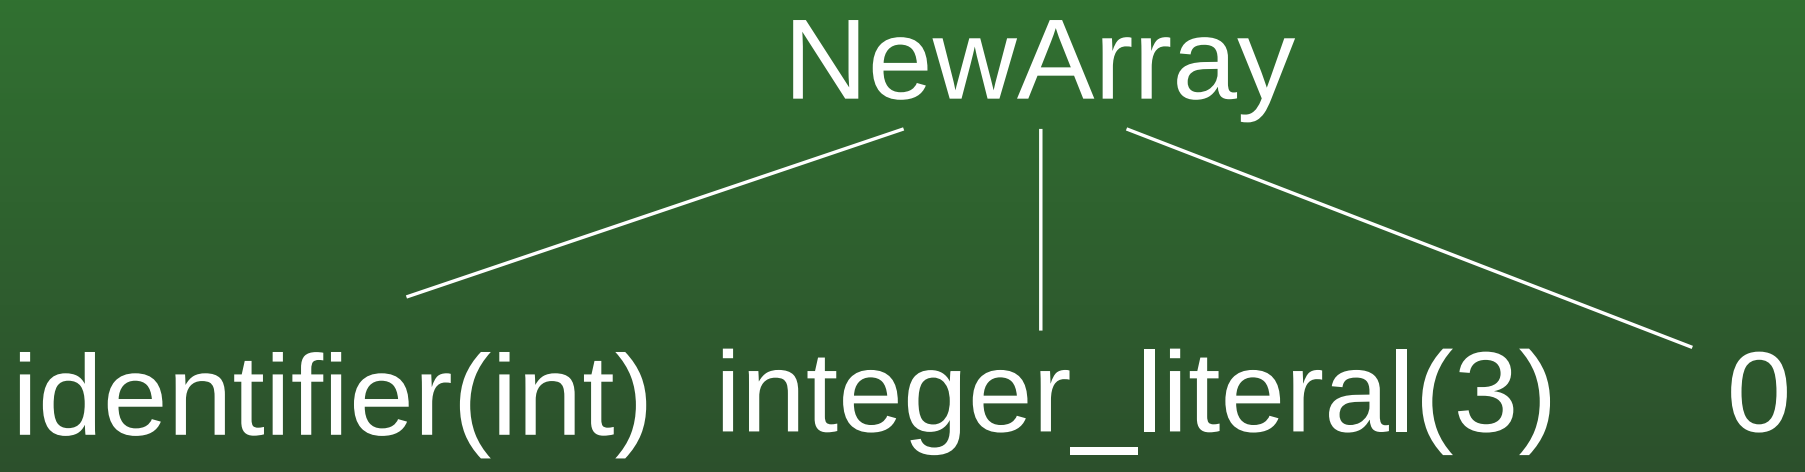

04-33: New Array Expressions

```
new int[4][];
```

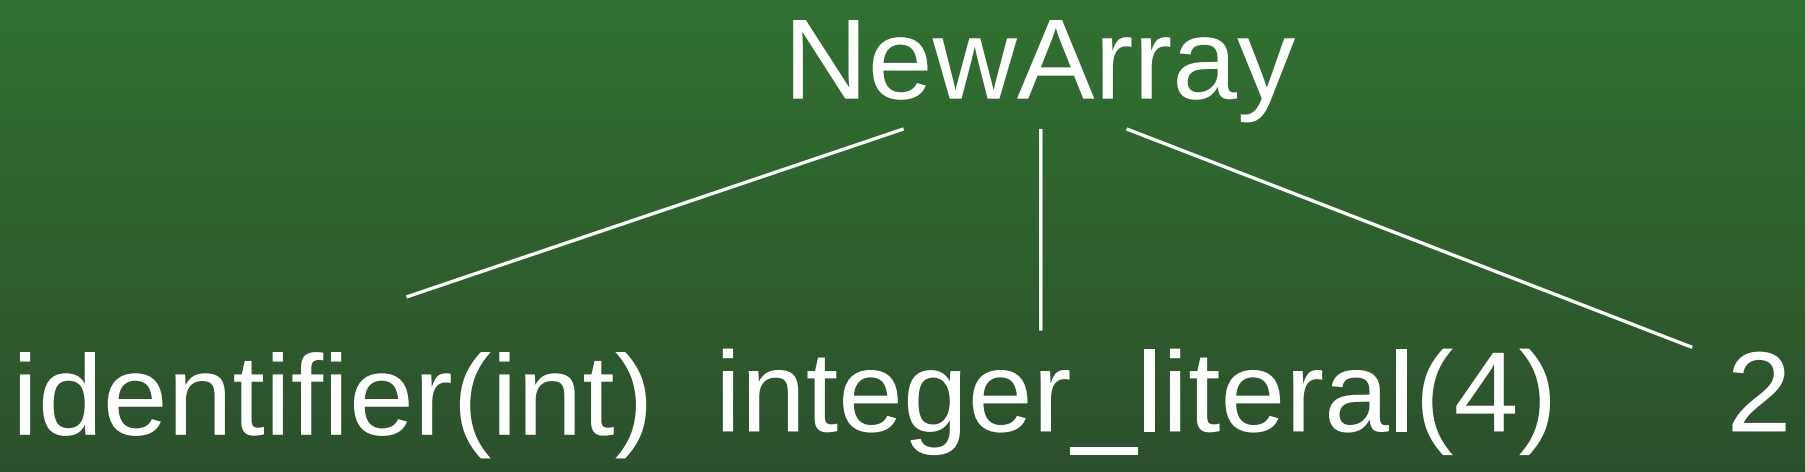

04-34: New Array Expressions

```
nt A[][] = new int[5][];
```

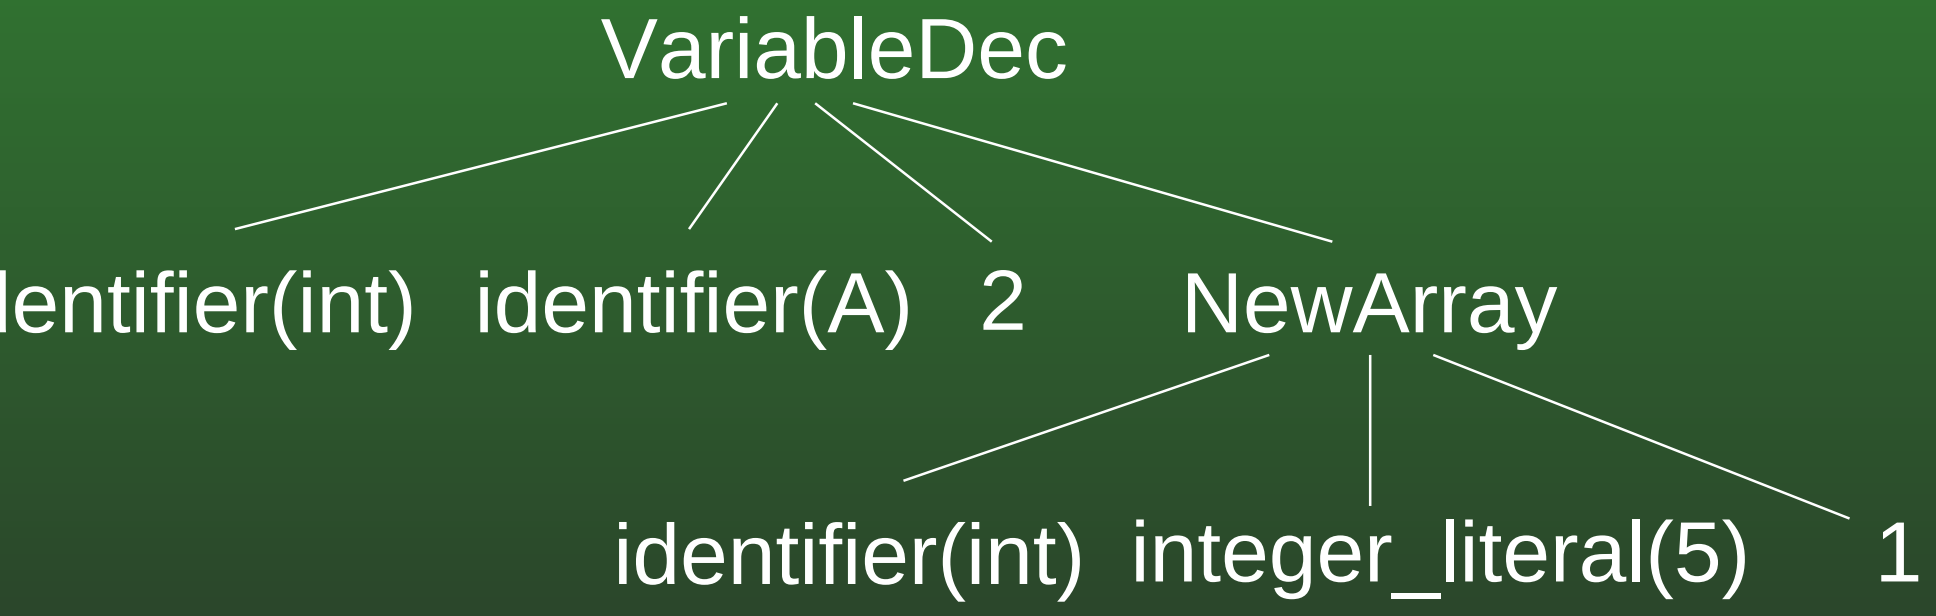

04-35: Representing Trees in Java

- Each “Subtree” is an instance variable
- For trees with variable numbers of children (function calls, etc.), use arrays or Vectors
- Access instance variables using accesser methods

04-36: Representing Trees in Java

- Expression Trees
  - Abstract ASTExpression superclass
  - Integer Literal Expression
  - Operator Expression

Go over code for ASTExpression, ASTIntegerLiteralExpression, ASTOperatorExpression

04-37: Representing Trees in Java

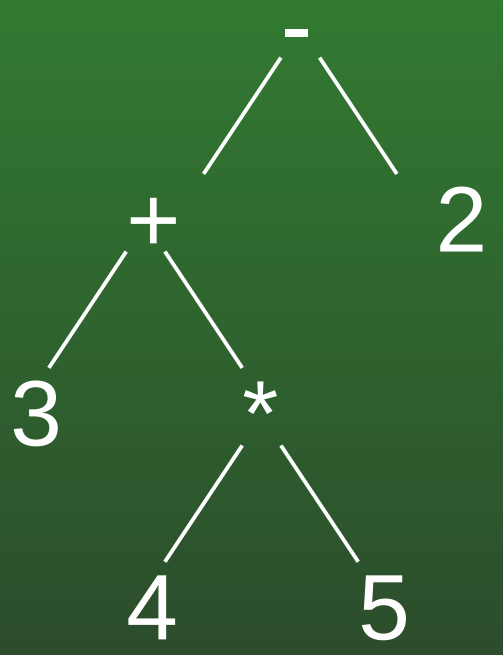

- How could we build this tree?

04-38: Representing Trees in Java

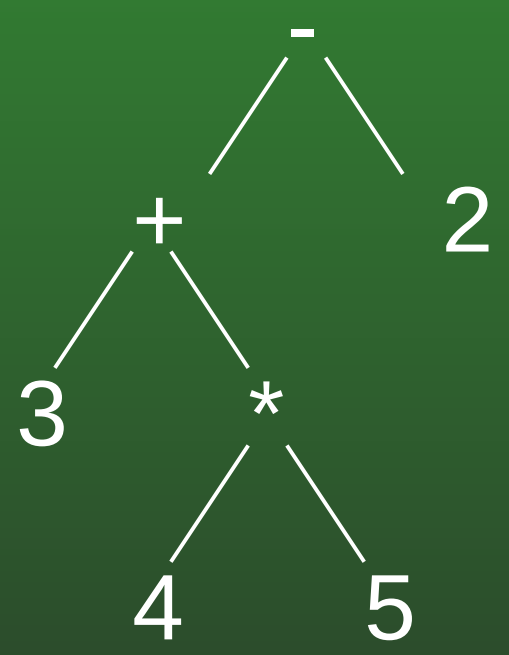


```
ASTExpression t1, t2, tree;
t1 = new ASTOperatorExpression(ASTIntegerLiteral(4),
                               ASTIntegerLiteral(5), "*");
t2 = new ASTOperatorExpression(ASTIntegerLiteral(3),
                               t1, "+");
tree = new ASTOperatorExpression(t2,
                                 ASTIntegerLiteral(2),
                                 ASTOperatorExpression.MINUS);
```

04-39: Representing Trees in Java

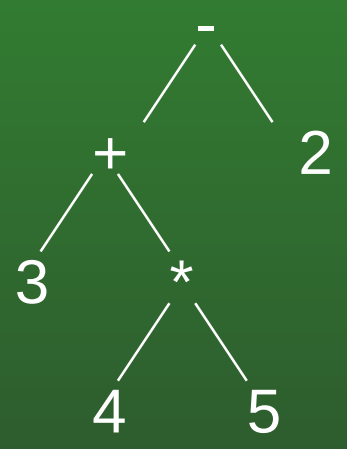

- We can extract the integer value 2:

```
int value = ((ASTIntegerLiteral)
                ((ASTOperatorExpression) tree).right()
            ).value();
```

04-40: Representing Trees in Java

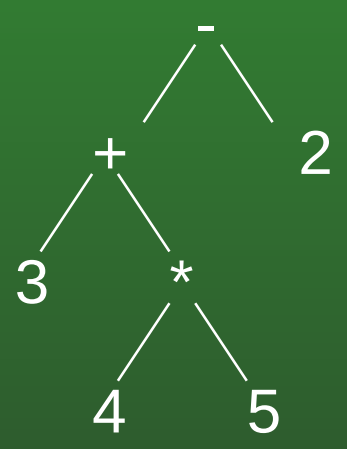

- We can extract the integer value 3:

```
int value = ((ASTIntegerLiteral)
               ((ASTOperatorExpression)
                  ((ASTOperatorExpression) tree).left()
               ).left()
            ).value();
```

04-41: Representing Trees in Java

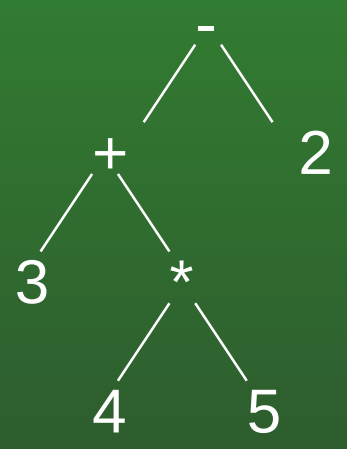

- We can extract the integer value 5:

```
int value = ((ASTIntegerLiteral)
               ((ASTOperatorExpresion)
                  ((ASTOperatorExpression)
                     ((ASTOperatorExpression) tree).left()
                  ).right()
               ).right()
            ).value();
```

04-42: Representing Trees in Java

- A few extra details ...
  - All AST nodes will contain a “line” instance variable
    - Accessed through the `line()` and `setline()` methods
    - Notes which line on the input file the node appeared on
  - All AST nodes will contain an “accept” method (explained in the next few slides)

04-43: Representing Trees in Java

- Trees with variable numbers of children

```
foo(3,x,4,5);
```

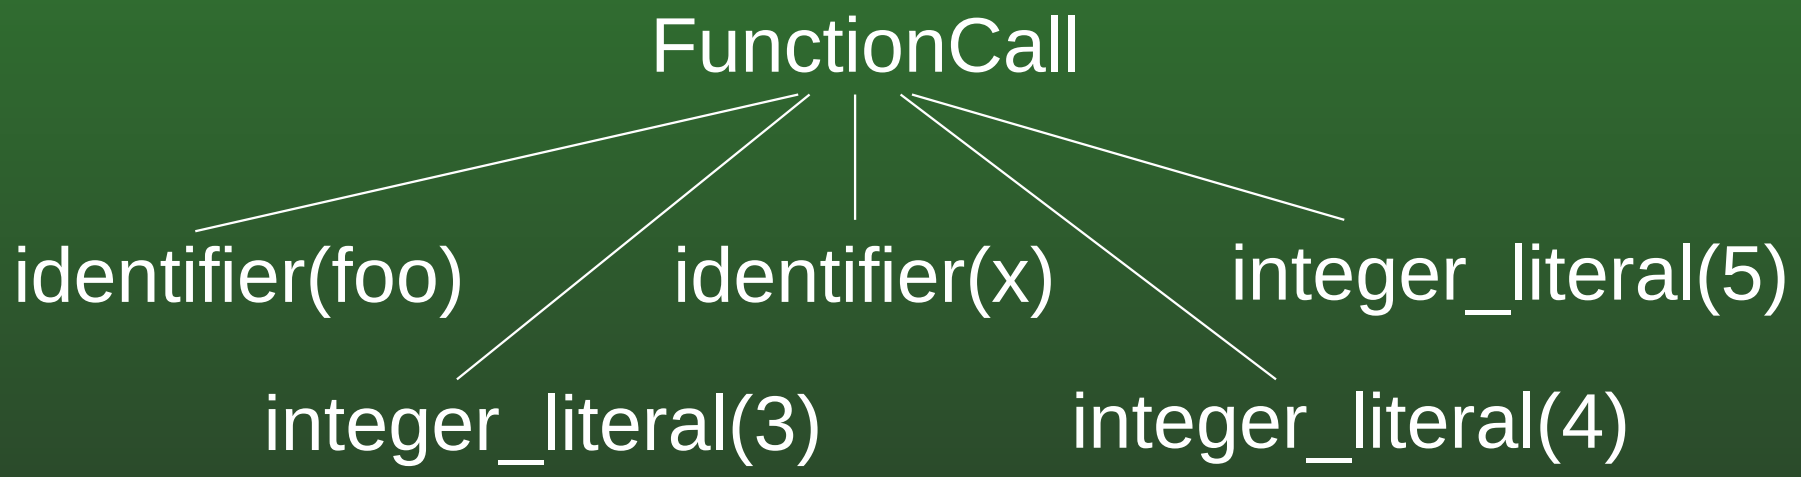

04-44: Variable # of Children

- Constructor which creates no children
  - Also a constructor that contains a single child
- Add children with `addElement` method
- Find children with `elementAt` method
- Find # of children with `size` method

Put up `ASTFunctionCallStatement.java`

04-45: Traversing Trees in Java

- Want to write a function that calculates the value of an expression tree
  - Function that takes as input an expression
  - Returns the value of the expression

04-46: Traversing Trees in Java

```
int Calculate(ASTExpression tree) {
 ...

}
```

- How do we determine what kind of expression we are traversing
- (Integer Literal, or Operator)?

04-47: Traversing Trees in Java

```
int Calculate(ASTExpression tree) {

    if (tree instance of ASTIntegerLiteral)
       return ((ASTIntegerLiteral)tree).value();

    else {
       int left = Calculate(((ASTOperatorExpression) tree).left());
       int right = Calculate(((ASTOperatorExpression) tree).right());
       switch ((ASTOperatorExpression) tree.operator()) {
          case ASTOperatorExpression.PLUS:
            return left + right;
          case ASTOperatorExpression.MINUS:
            return left - right;
          case ASTOperatorExpression.TIMES:
            return left * right;
          case ASTOperatorExpression.DIVIDE:
            return left / right;
       }
    }
}
```

04-48: Traversing Trees in Java

- Using “instance of”, and all of the typecasting, is not very elegant
- There is a better way – Visitor Design Pattern

04-49: Traversing Trees in Java

```
int Calculate(ASTExpression tree) {

 if (tree instance of ASTIntegerLiteral)
   return CalculateIntegerLiteral((ASTIntegerLiteral)tree);
 else if (tree instance of ASTOperatorExpression
   return CalculateOperatorExpression((ASTOperatorExpression) tree);
 else
   return -1; /* error! */
}
```

04-50: Traversing Trees in Java

```
int CalculateOperatorExpression(ASTOperatorExpression tree) {
       int left = Calculate(tree.left());
       int right = Calculate(tree.right());
       switch (tree.operator()) {
          case ASTOperatorExpression.PLUS:
            return left + right;
          case ASTOperatorExpression.MINUS:
            return left - right;
          case ASTOperatorExpression.TIMES:
            return left * right;
          case ASTOperatorExpression.DIVIDE:
            return left / right;
       }
    }
}

int CalculateIntegerLiteral(ASTIntegerLiteral tree) {
        return tree.value();
}
```

04-51: Virtual Function Review

- Quick Review of virtual functions
- See files `Shape.java`, `Circle.java`, `Square.java` on other screen

```
Shape Shapes[];
...
for (i=0; i<Shapes.size; i++)
    Shapes[i].draw();
```

04-52: Traversing Trees in Java

- Using “instance of”, and all of the typecasting, is not very elegant
- There is a better way – Visitor Design Pattern
  - A Visitor is used to traverse the tree
  - Visitor contains a Visit method for each kind of node in the tree
  - The visit method determines how to process that node
  - Each node in the AST has an “accept” method, which calls the appropriate visitor method, passing in a pointer to itself

04-53: Traversing Trees in Java

- Each node in the AST contains an “accept” method
  - Takes as input a visitor
  - Calls the appropriate method of the visitor to handle the node, passing in a pointer to itself
  - Returns whatever the visitor tells it to return

Put up examples of Expression AST w/ “accept” methods

04-54: Traversing Trees in Java

```
ASTExpression.java

Object Accept(ASTVisitor v);
```

```
ASTOperatorExpression

Object Accept(ASTVisitor v)
   return V.VisitOperatorExpression(this)
```

```
ASTIntegerLiteral

Object Accept(ASTVisitor v)
   return V.VisitIntegerLiteral(this)
```

```
Calculate (implements ASTVisitor)



   Object VisitOperatorExpression (...) {

   }


   Object VisitIntegerLiteral (...) {

   }
```

04-55: Visitor Interface

- Visitor Interface for Expression Trees

```
public interface ASTVisitor {
    public Object VisitIntegerLiteral(ASTIntegerLiteral literal);
    public Object VisitOperatorExpression(ASTOperatorExpression opexpr);
}
```

04-56: Visitor Implementation

- Write a Visitor to calculate the value of an expression tree
  - Implement `VisitInitegerLiteral` and `VisitOperatorExpression` methods

```
public Object VisitIntegerLiteral(ASTIntegerLiteral literal) {

   ...

}
```

04-57: Visitor Implementation

- Write a Visitor to calculate the value of an expression tree
  - Implement `VisitInitegerLiteral` and `VisitOperatorExpression` methods

```
public Object VisitIntegerLiteral(ASTIntegerLiteral literal) {
    return new Integer(literal.value());
}
```

04-58: Visitor Implementation

```
public Object VisitOperatorExpression(ASTOperatorExpression opexpr) {
     ...
}
```

04-59: Visitor Implementation

```
public Object VisitOperatorExpression(ASTOperatorExpression opexpr) {

    Object left = opexpr.left().Accept(this);
    Object right = opexpr.right().Accept(this);

    int leftValue = ((Integer) left).intValue();
    int rightValue = ((Integer) right).intValue();
    switch (opexpr.operator()) {
    case ASTOperatorExpression.PLUS:
        return new Integer(leftValue + rightValue);
    case ASTOperatorExpression.MINUS:
        return new Integer(leftValue - rightValue);
    case ASTOperatorExpression.MULTIPLY:
        return new Integer(leftValue * rightValue);
    case ASTOperatorExpression.DIVIDE:
        return new Integer(leftValue / rightValue);
    default:
        System.out.println("ERROR -- Illegal Operator");
         return new Integer(-1);
    }
}
```

04-60: More Visitors – Tree Printing

- We'd like to print out expression trees
- Show the structure of the tree itself

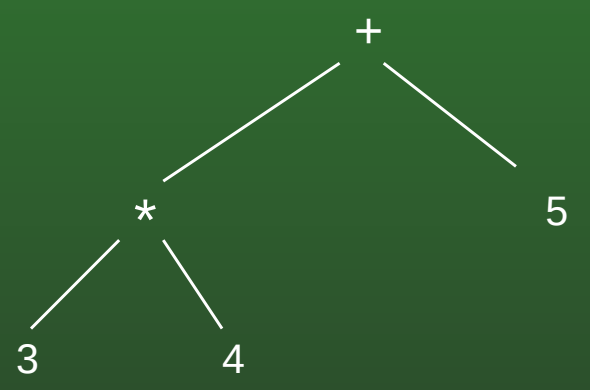


```
+
  *
    3
    4
  5
```

04-61: More Visitors – Tree Printing

- We'd like to print out expression trees
- Show the structure of the tree itself

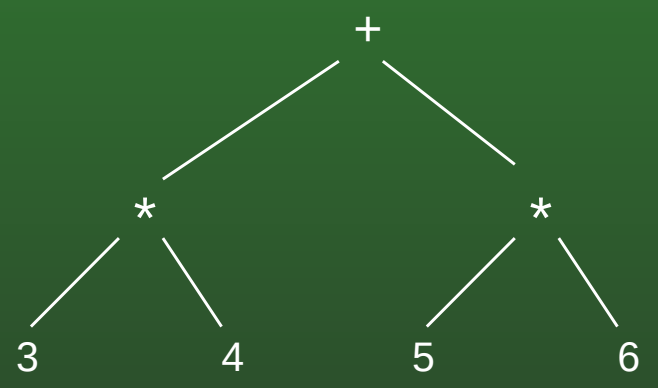


```
+
  *
    3
    4
  *
    5
    6
```

04-62: Tree Printing

- Maintain a “current indentation level”
- To Print out a Integer Literal
  - Print the value at the current indentation level
- To Print out an operator
  - Print the root of the tree at the current indentation level
  - Print the children at a larger indentation level

Code for Tree Printing on other screen

04-63: Visitor Overview

- Each node in the AST has an “accept” method, that takes a visitor as an input parameter, and calls the appropriate method of that visitor. The “accept” method then returns whatever the visit method returns.
- The Visitor has a visit method for each AST node, which handles visiting that node. *Typically*, visit methods call the “accept” method on the subtrees of the node, collecting data from the subtrees. This data is then combined, and returned.
- Visitors often contain instance variables that allow data to be shared among visit methods (such as the “current indentation level” for printing trees)

04-64: JavaCC Actions

- Each JavaCC rule is converted into a parsing method
  - Just like a recursive descent parser created by hand
- We can add arbitrary Java code to these methods
- We can also add instance variables and helper methods that every parser method can access

04-65: JavaCC Actions

- Adding instance variables

```
PARSER_BEGIN(parserName)

public class parserName {

     /* instance variables and helper methods */

     /* Optional ‘‘main’’ method (the ‘‘main’’
        method can also be in a separate file)  *
}

PARSER_END(parserName)
```

04-66: JavaCC Rules

```
<return type> <rule name>() :
{
  /* local variables */
}
{
    Rule
|   Rule2
|     ...
}
```

- Each rule can contain arbitrary Java code between { and }

Put up code for parens1.jj file

04-67: JavaCC Rules

- JavaCC rules can also return values
  - Works just like any other method
- Use “<variable> =” syntax to obtain values of method calls

Put up code for parens2.jj

04-68: JavaCC Rules

- Building A JavaCC Calculator
- How would we change the following .jj file so that it computed the value of the expression, as well as parsing the expression?

Put up code for calc.noact.jj

04-69: JavaCC Rules

```
int complete_expression():
{ int result; }
{
  result = expression() <EOL>
           { return result; }
}
```

04-70: JavaCC Rules

```
int factor():
{int value; Token t;}
{
    t = <INTEGER_LITERAL>
          { return Integer.parseInt(t.image); }
|   <MINUS> value = factor()
          { return 0 - value; }
|   <LPAREN> value = expression() <RPAREN>
          { return value; }
}
```

04-71: JavaCC Rules

```
int term():
{Token t; int result; int rhs;}
{
  result = factor() ( (t = <MULTIPLY> | t = <DIVIDE>) rhs = factor()
                {  if (t.kind == MULTIPLY)
                       result = result * rhs;
                    else
                       result = result / rhs;
                }
                  )*
        { return result; }
}
```

Swap other screen to calc.jj

04-72: Parsing a term()

- Function to parse a factor is called, result is stored in `result`
- The next token is observed, to see if it is a * or /.
- If so, function to parse a factor is called again, storing the result in `rhs`. The value of result is updated
- The next token is observed to see if it is a * or /.
- ...

04-73: Expression Examples

- 4
- 3 + 4
- 1 + 2 * 3 + 4

04-74: Input Parameters

- JavaCC rules == function calls in generated parser
- JavaCC rules can have *input parameters* as well as return values
- Syntax for rules with parameters is the same as standard method calls

04-75: Input Parameters

```
void expression():
{ }
{
  term() expressionprime()
}

void expressionprime():
{ }
{
      <PLUS> term() expressionprime()
|     <MINUS> term() expressionprime()
|                          {  }
}
```

- What should `<PLUS> term() expressionprime()` return?

04-76: Input Parameters

- What should `<PLUS> term() expressionprime()` return?
  - Get the value of the previous term
  - Add that value to `term()`
  - Combine the result with whatever `expressionprime()` returns
- How can we get the value of the previous term?
- How can we combine the result with whatever `expressionprime()` returns?

04-77: Input Parameters

- What should `<PLUS> term() expressionprime()` return?
  - Get the value of the previous term
  - Add that value to `term()`
  - Combine the result with whatever `expressionprime()` returns
- How can we get the value of the previous term?
  - Have it passed in as a parameter
- How can we combine the result with whatever `expressionprime()` returns?
  - Pass the result into `expressionprime()`, and have `expressionprime()` do the combination

04-78: Input Parameters

```
int expression():
{int firstterm; int result;}
{
   firstterm = term() result = expressionprime(firstterm)
                             {  return result; }
}

int expressionprime(int firstterm):
{ int nextterm; int result; }
{
      <PLUS> nextterm = term() result = expressionprime(firstterm + nextterm)
                             { return result; }
|     <MINUS> nextterm = term() result = expressionprime(firstterm - nextterm)
                             { return result; }
|                            { return firstterm; }
}
```

04-79: Building ASTs with JavaCC

- Instead of returning values, return trees
- Call constructors to build subtrees
- Combine subtrees into larger trees

Put up code for calc.noact.jj

04-80: Building ASTs with JavaCC

```
ASTExpression factor():
{ASTExpression value; Token t;}
{
   ...
|    t = <INTEGER_LITERAL>
          { return new ASTIntegerLiteral(Integer.parseInt(t.image)); }
   ...
}
```

04-81: Building ASTs with JavaCC

```
ASTExpression factor():
{ASTExpression value; Token t;}
{
    <MINUS> value = factor()
          { return new ASTOperatorExpression(new ASTIntegerLiteral(0),
                                             value,
                                             ASTOperatorExpression.MINUS);}
 ...
}
```

04-82: Building ASTs with JavaCC

```
ASTExpression term():
{Token t; ASTExpression result; ASTExpression rhs;}
{
  result = factor() ( (t = <MULTIPLY> | t = <DIVIDE>) rhs = factor()
                {  result = new ASTOperatorExpression(result, rhs, t.image);
                }
                  )*
        { return result; }
}
```

04-83: Project

- Files `ASTxxx.java`
- Tree Printing Visitor
- Driver program

04-84: Project Hints

- The Abstract Syntax Tree (`ASTxxx.java`) is pretty complicated. Take some time to understand the structure of sjava ASTs
- There is nothing in the AST for "++" or unary minus, but:
  - `<var>`++ is the same as `<var> = <var> + 1`
  - -`<exp>` is the same as `0 - <exp>`